

GESTION DES STOCK

FICHER-MAITRE

Produit: 70 # Pièce: 18010

A/C/R: A

Date: 99.10.06

Description: FUSE .75 A SB

Unité	Loc	Cat	Inv	-2-	L.T.	Réq	Org	Type	-7-	Prix	-9-
<u>CH</u>	<u>ZBP</u>	<u>FU1</u>	<u>3</u>	<u> </u>	<u> </u>	<u>A</u>	<u>C</u>	<u>A</u>	<u> </u>	<u>1</u>	<u> </u>

Fourn.: 20255

Desc. achat: FUSE LITTELFUSE 313.750

Nom:

Fourn.:

Desc. achat:

Nom:

Fourn.:

Desc. achat:

Nom:

Minimum:

Maximum:

Embal.:

Achat min.:

Unité-1:

Mult-1 (.xxx):

Unité-2:

Mult-2 (.xxx):

Mat. (.xxx): 0.280

Remarques:

M.O. (.xxx):

Vend-1 (.xx):

Vend-2 (.xx):

Vend-3 (.xx):

Vend-4 (.xx):

Vend-5 (.xx):

Préparé par: Michel Noreau

Approuvé par:

P/N 18010

28

F 00255
C C

GLASS BODY

3AG Slo-Blo® Type Fuse

A standard for cost-effective reliability and performance in circuit protection, the 3AG fuse satisfies a broad range of application requirements.

ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Opening Time
110%	4 hours, Minimum
135%	1 hour, Maximum
200%	5 seconds, Minimum

AGENCY APPROVALS: Listed by Underwriters Laboratories and Certified by CSA through 8 amperes. 313 000 Series approved by MITI from 1 through 5 amperes.

AGENCY FILE NUMBERS: UL E10480, CSA LR 29862.


FUSES TO MIL SPEC: See F02B cartridge type in Military Section.

PATENTED

ORDERING INFORMATION:


Cartridge Catalog Number	Axial Lead Catalog Number	Ampere Rating	Voltage Rating	Nominal Resistance Cold Ohms	Nominal Melting Pt A° Sec.
313.010	315.010	1/100	250	3300	0.00121
313.031	315.031	1/32	250	330	0.00303
313.040	315.040	1/100	250	220	0.00530
313.062	315.062	1/16	250	91.0	0.0210
313.100	315.100	1/10	250	33.3	0.0850
313.125	315.125	1/8	250	22.3	0.152
313.150	315.150	15/100	250	15.3	0.270
313.175	315.175	1/75	250	8.60	0.177
313.187	315.187	3/16	250	7.95	0.230
313.200	315.200	2/10	250	6.54	0.270
313.250	315.250	1/4	250	4.27	0.385
313.300	315.300	3/10	250	3.11	0.730
313.375	315.375	3/8	250	2.08	1.23
313.400	315.400	4/10	250	1.86	1.35
313.500*	315.500	1/2	250	1.25	2.55
313.600	315.600	5/10	250	0.914	4.00
313.700	315.700	7/10	250	0.695	5.90
313.750	315.750	3/4	250	0.617	7.16
313.800	315.800	8/10	250	0.550	8.00
313.001*	315.001	1	250	0.375	14.0
313.01.2	315.01.2	1 1/4	250	0.276	21.5
313.1.25	315.1.25	1 1/4	250	0.258	24.0
313.01.5*	315.01.5	1 1/2	250	0.150	36.0
313.01.6	315.01.6	1 1/2	250	0.170	49.6
313.01.8	315.01.8	1 1/2	250	0.140	58.0
313.002*	315.002	2	250	0.116	77.0
313.2.25	315.2.25	2 1/2	250	0.0960	121.0
313.02.5	315.02.5	2 1/2	250	0.0805	130.0
313.02.8	315.02.8	2 1/2	250	0.0670	170.0
313.003*	315.003	3	250	0.0598	200.0
313.03.2	315.03.2	3 1/2	250	0.0525	209.0
313.004*	315.004	4	250	0.0306	76.1
313.005*	315.005	5	250	0.0212	140.0
313.6.25*	315.6.25	6 1/4	250	0.0152	242.0
313.6.30	315.6.30	5.30	250	0.0152	242.0
313.007*	315.007	7	250	0.0127	347.0
313.008*	315.008	8	250	0.0110	445.0
313.010*	315.010	10	32	0.00820	760.0
313.012	315.012	12	32	0.00640	1200.0
313.015	315.015	15	32	0.00500	1670.0
313.020	315.020	20	32	0.00220	9560.0
313.025	315.025	25	32	0.00170	16500.0
313.030	315.030	30	32	0.00120	26900.0

*These ratings available with an indicating option. Add the 'ID' designation to the series number. i.e. 313.50(1) ID.

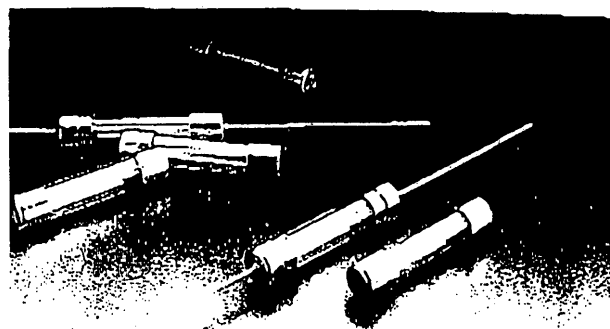

313 000 Series

315 000 Series

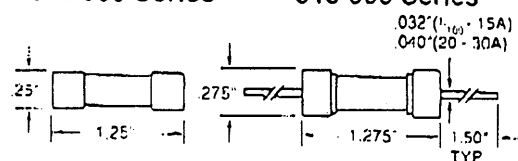

Axial Lead Material: Solder coated copper.

Average Time Current Curves

